Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

NMB TECHNOLOGIES INC.

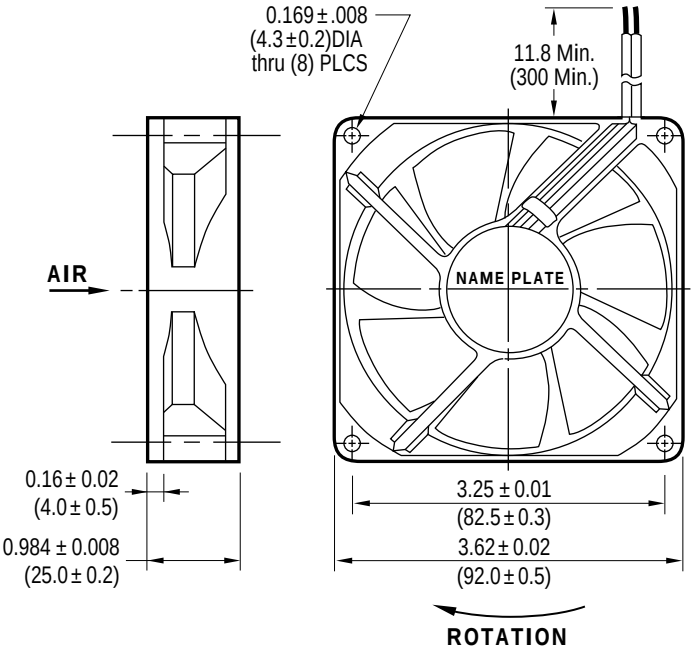

FEATURES:

Size	3.62 in sq. X 0.98 in (92mm sq. X 25mm)
Airflow	27 - 62 CFM
Weight	3.5 oz (100g)
Noise	25 - 41 dBA
Lead Wire	AWG 24, Red/Black, UL1007, CSA TR-64
Terminal	0.110 in
(Optional)	Rib type only (LOO)
Impeller and Venturi	UL94V-0 Reinforced plastic

† Non-stock item, may be subject to lead time

†† Rib-type is a non-stock item, may be subject to lead time

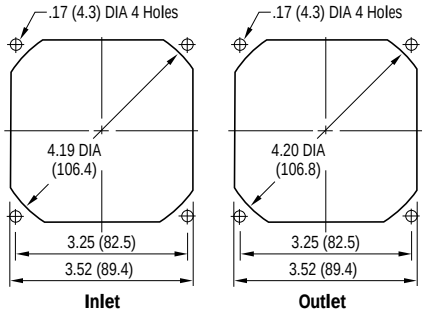

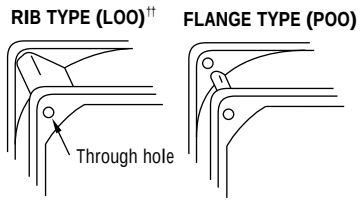

Dimensions are in inches. ( ) are in millimeters

MODEL	VOLTAGE (V)	RANGE (V)	POWER (W)	CURRENT (mA)	SPEED (RPM)	NOISE (dBA)	NOISE NPEL (BELS) 100%	80%	60%	20%	PRESSURE (in H_2O)	AIRFLOW CFM
3610KL-04W-B10-P00	12	6 - 13.8	0.88	73	1750	25	4.26	4.12	4.22	3.93	0.06	27
B20-P00†	12	6 - 13.8	1.32	110	2100	29	4.26	4.20	4.34	4.48	0.08	34
B30-P00	12	6 - 13.8	1.92	160	2450	34	4.72	4.78	4.80	4.80	0.11	41
B40-P00†	12	6 - 13.8	2.64	220	2850	37	4.98	4.92	5.08	5.05	0.15	48
B50-P00	12	6 - 13.8	3.78	315	3200	41	5.40	5.73	5.41	5.25	0.19	55

MODEL	VOLTAGE (V)	RANGE (V)	POWER (W)	CURRENT (mA)	SPEED (RPM)	NOISE (dBA)	NOISE NPEL (BELS) 100%	80%	60%	20%	PRESSURE (in H_2O)	AIRFLOW CFM
3610KL-05W-B10-P00	24	10 - 27.6	1.13	47	1750	25	4.26	4.12	4.22	3.93	0.06	27
B20-P00†	24	10 - 27.6	1.37	57	2100	29	4.26	4.20	4.34	4.48	0.08	34
B30-P00	24	10 - 27.6	2.09	87	2450	34	4.72	4.78	4.80	4.80	0.11	41
B40-P00†	24	10 - 27.6	2.88	120	2850	37	4.98	4.92	5.08	5.05	0.15	48
B50-P00	24	10 - 25	3.84	160	3200	41	5.40	5.73	5.41	5.25	0.19	55